

Gateway



Low Voltage PSU (24 VDC)

Input Voltage Range16-36 VDC

Input Power2W

High Voltage PSU (100-277 VAC)

Input Voltage Range85-305 VDC/ 100-277 VAC

Input Power2W

Product Features

Operating Temperature-20 °C to 75 °C
-4 °F to 185 °F

Operating Temperature (Ex version)-15 °C to 60 °C
5 °F to 140 °F

Protection RatingIP66

Weight388 g / 13,69 oz

Weight (Ex version)1700 g / 3 lb 12 oz

CasingPolycarbonate,
Flameproof V0

Communication

Wireless ProtocolSecure Open Thread
(IEEE 802.15.4) & LTE Category 1


Broadcast Range100m / 328 ft (sight line)

Distance Between Radio Modules30m / 98 ft in Diagonal

Compliance


ExClass I, Div. 2, group ABCD
Class II, Div 2, Group EFG Class III
Ex eb mb IIC T4 Gb
Class I Zone 1 AEx eb mb IIC T4 Gb

Certifications

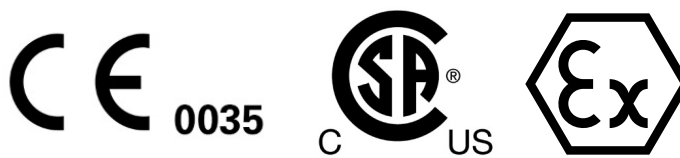

Installation Information

Mounting TypeMounting Brackets

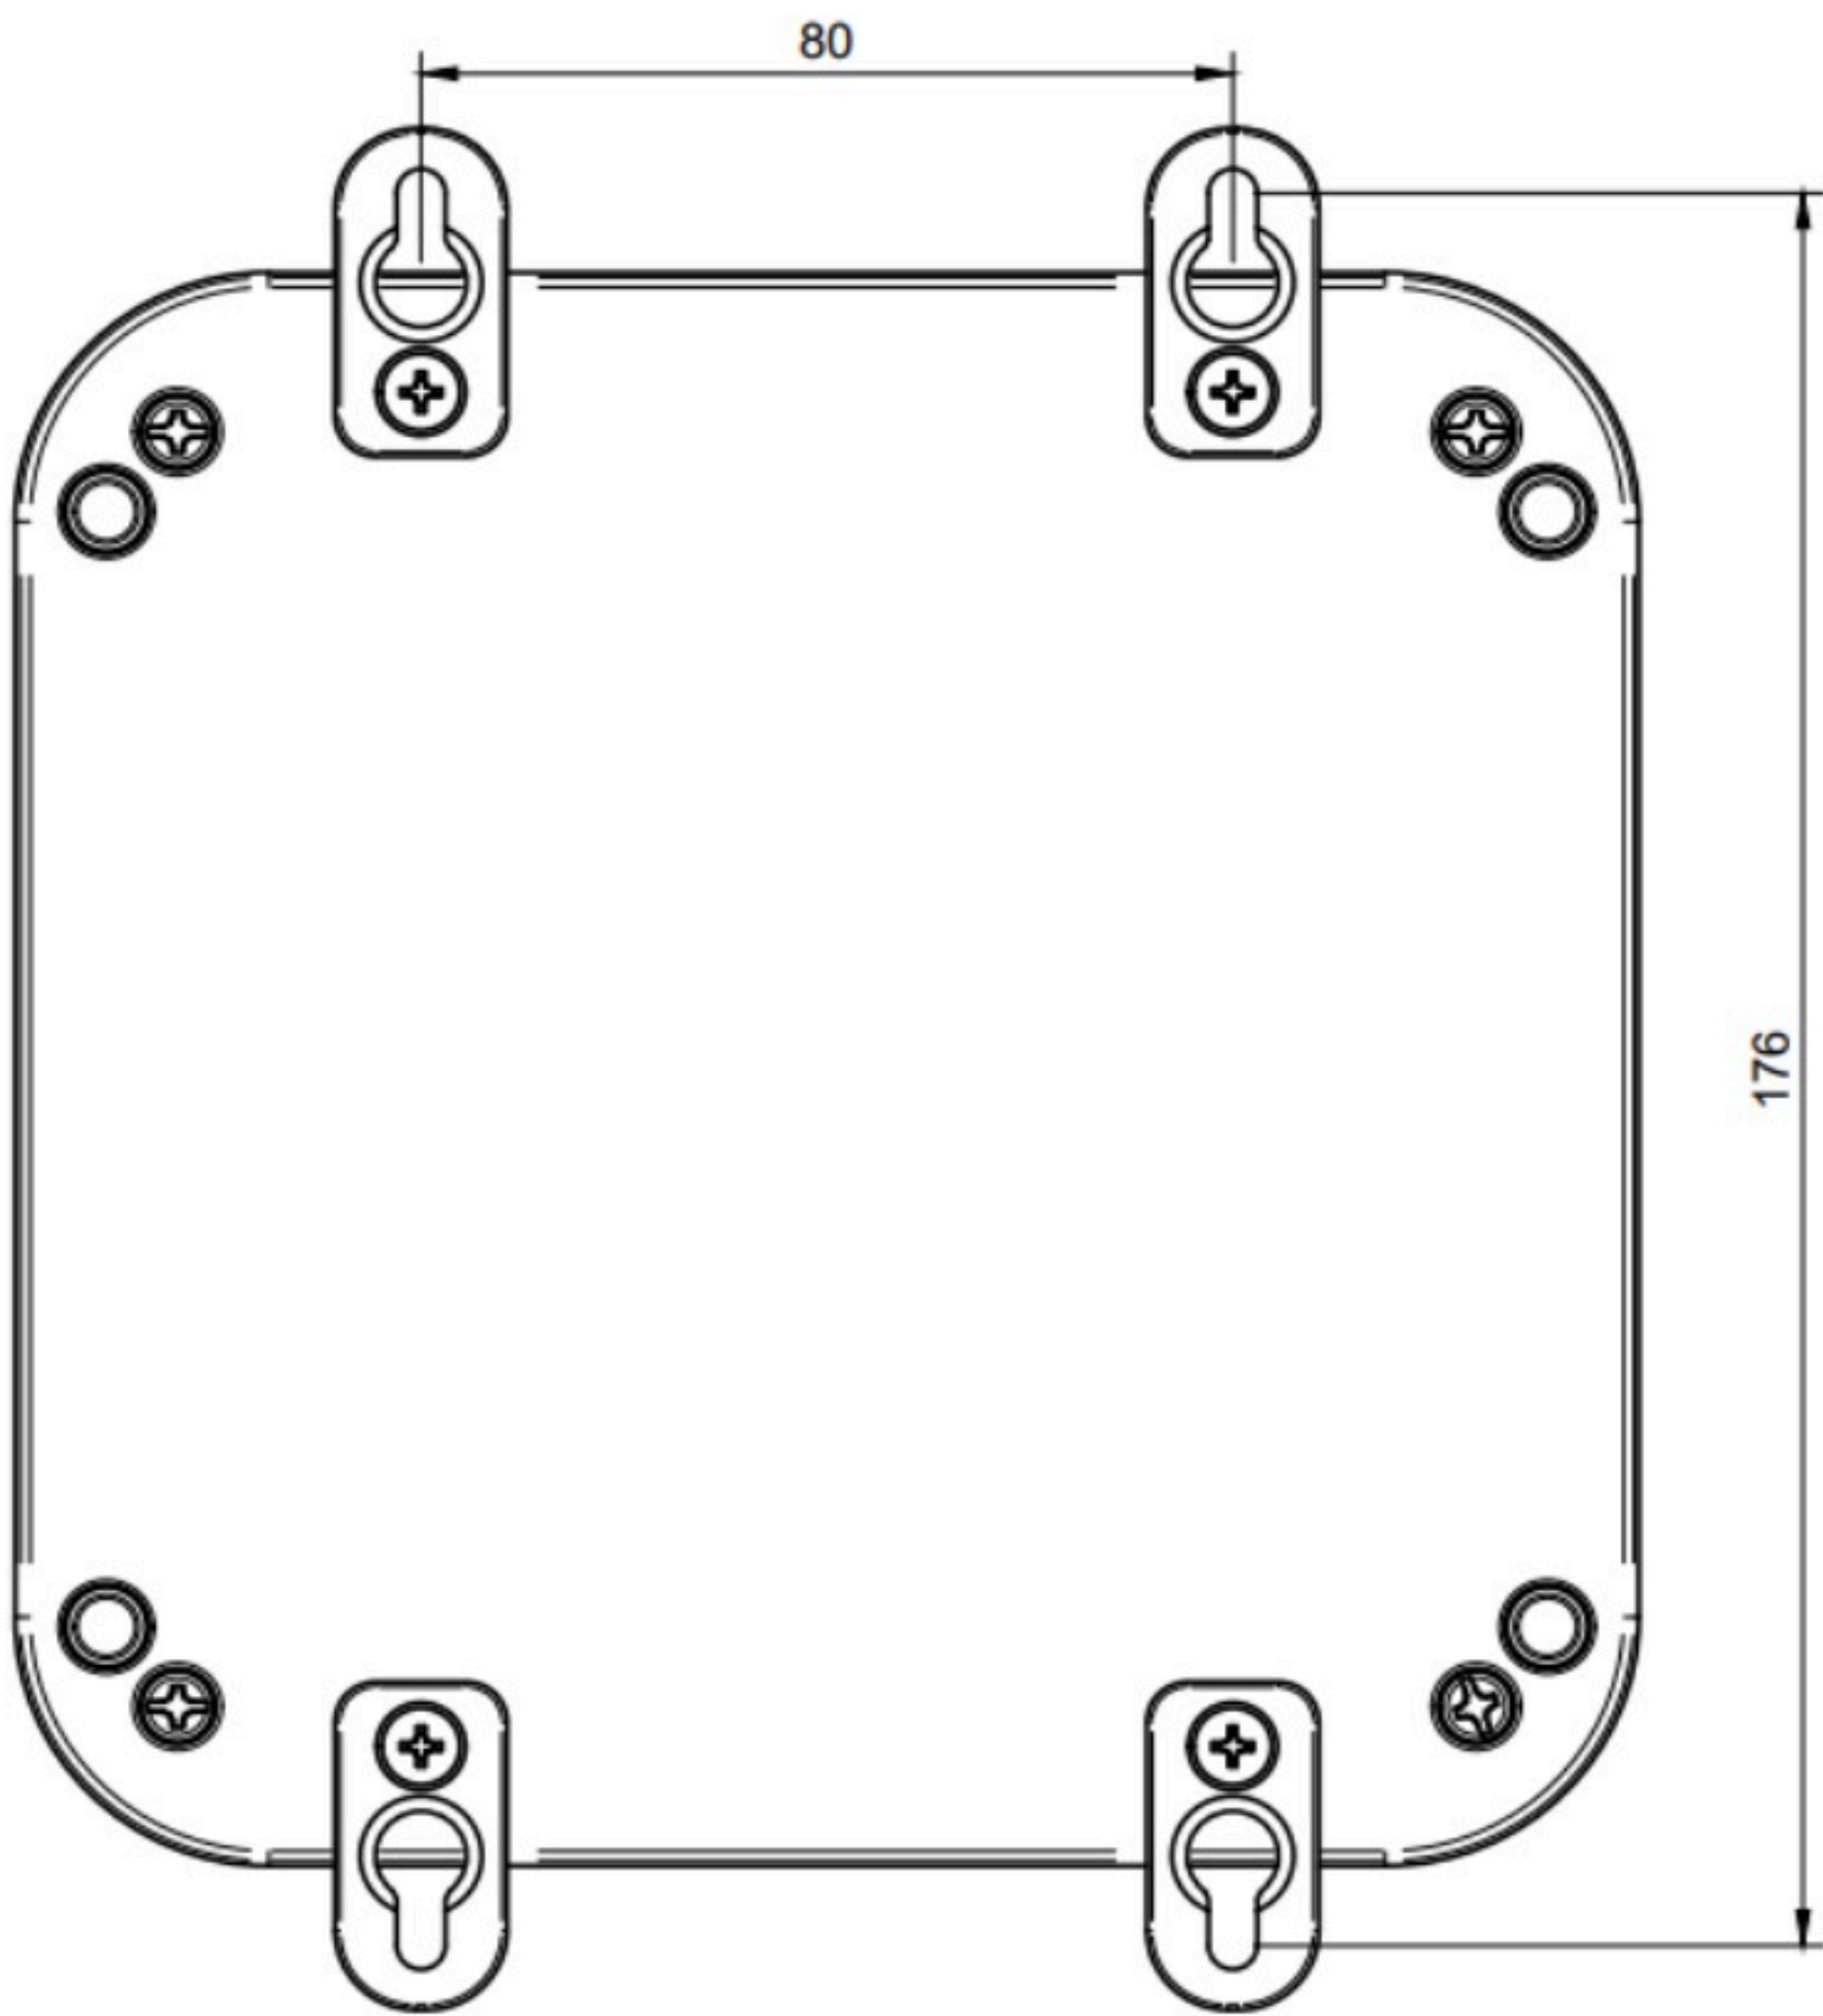

Specifications are subject to change without notice. All information provided in this document is for informational purposes only and is believed to be accurate at the time of publication. No warranties, express or implied, are made regarding the accuracy, completeness, or suitability of this information.

V260325.0821